



PVC Flooring

• WPC Flooring

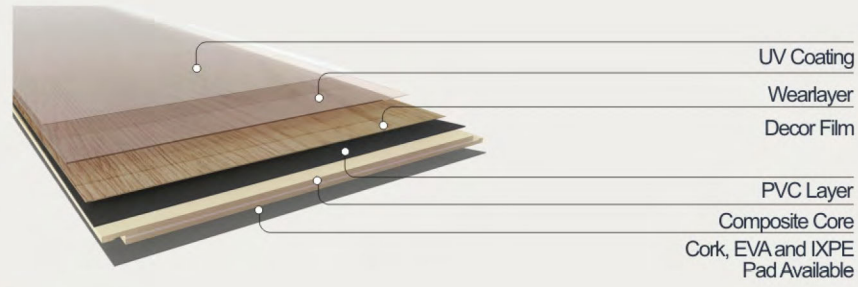

• PVC Flooring

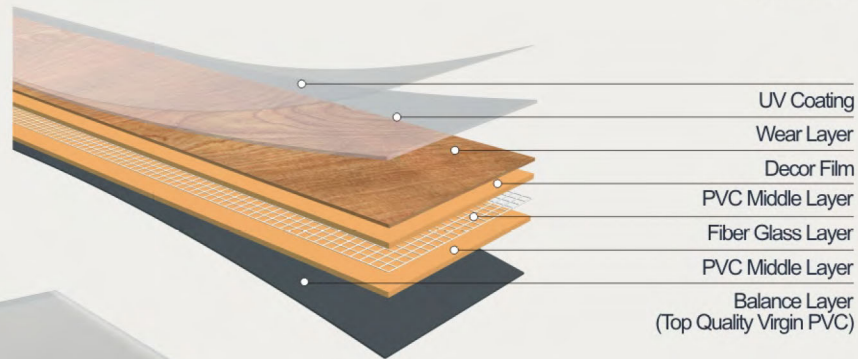

• SPC Flooring





PVC Flooring

Dry Back Size	
Unit(inch)	Unit(mm)
6" x 36"	152.4 x 936
6" x 48"	152.4 x 1219.2
7" x 48"	177.8 x 1219.2
9" x 48"	228.6*1219.2
18" x 18"	457.2*457.2
12" x 24"	304.8 x 609.6

CLICK Size	
Unit(inch)	Unit(mm)
6" x 36"	152.4 x 914.4
6" x 48"	152.4 x 1219.2
7" x 48"	177.8*1219.2
9" x 48"	221*1211
18" x 18"	449*449
12" x 24"	297.18*601.98

WPC Flooring	
Unit(inch)	Unit(mm)
6" x 48"	148*1220
7" x 48"	178*1220
9" x 48"	228.6*1220
9" x 60"	228.6*1524
9" x 72"	228.6*1800


Richwood Flooring, Beyond Your Imagination

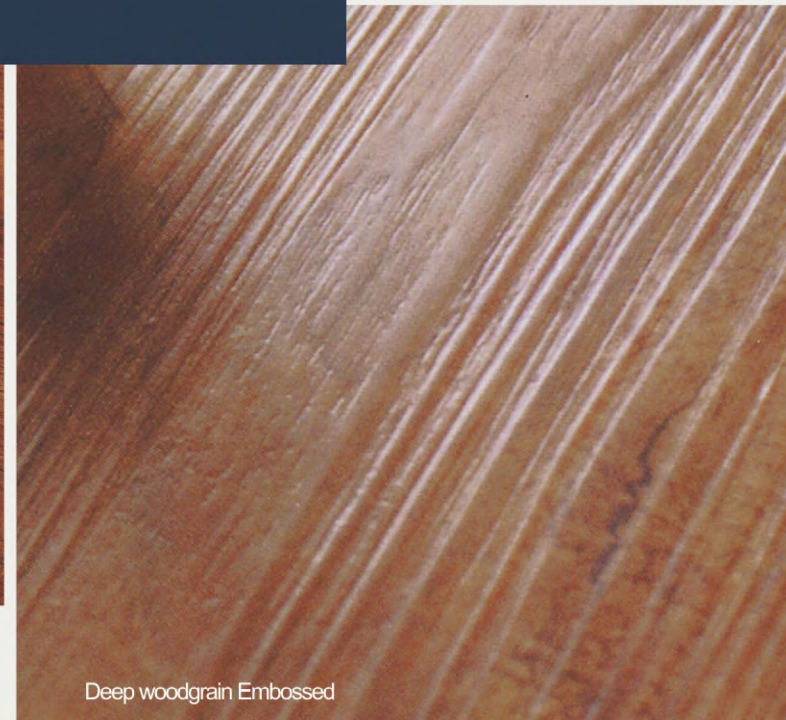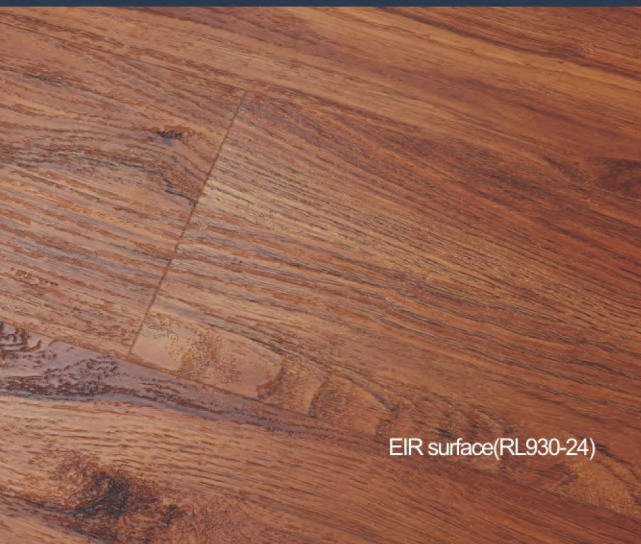


Richwood Flooring, Beyond Your Imagination



RL1131

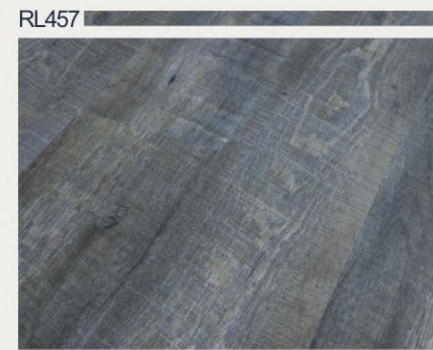

RL457

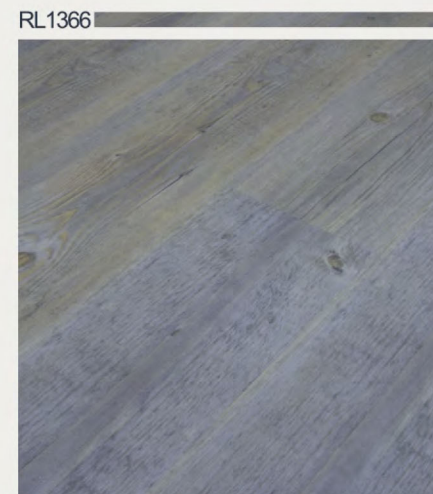

RL1366

Richwood Flooring,
Beyond Your Imagination




RL16001



RL16002



RL16003

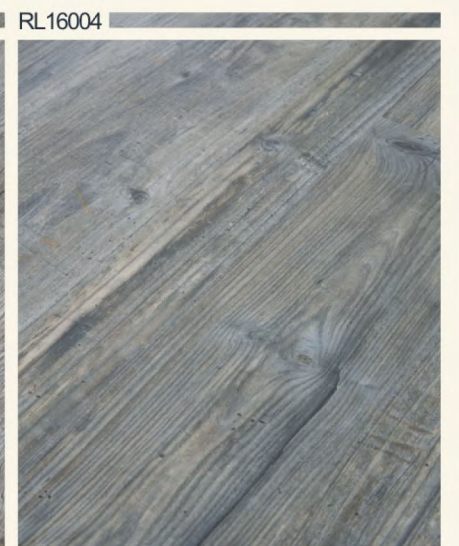

RL16004



RL16000



RL1134




RL298




RL1132




RL1133

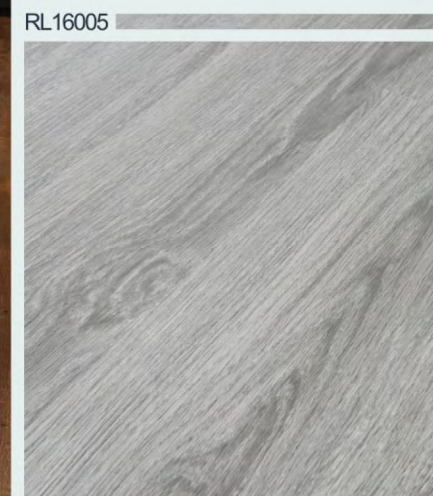


RL16005

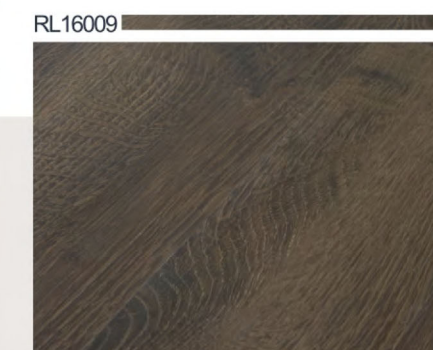


RL16009

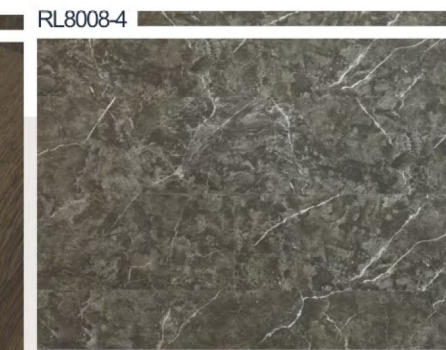

RL8008-4

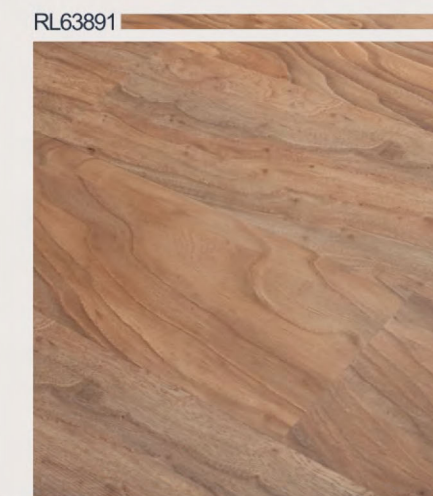

RL63891

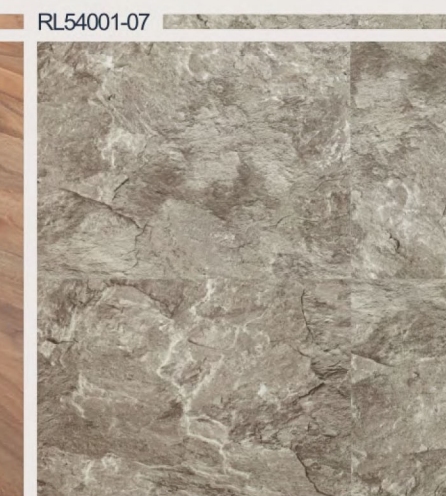


RL54001-07


**Richwood Flooring,
Beyond Your Imagination**

Technical Information


Feature	Test Condition	Temp. 23°C Humidity: 50%	European Standard	American Standard
Visual Defect(shade, Emboss, Gloss)			Observing from 60cm distance	
Wearlayer thickness			EN429	
UV Coating			BS3900	
Thickness			EN428	ASTM F386
Size			EN426	
Curling			EN434	ASTM F2199
Dimensional Stability(80°C/6Hr)			EN434	ASTM F2199
Delamination			EN ISO 24345:2006	
Residual Indentation			EN433	ASTM F1914
Smoke Density				ASTM E662
Determination of Mass per Unit			EN430	
Flexibility			EN435	
Chemical Resistant			EN423	ASTM F925
Abrasion test			EN660-2	
Toxicity			BN71 Prt 3	
Color Fastness			EN20105-B20(degree)	
Flammability			EN13501-1:2007+A1:2009	
Slip Resistant			BIA Ramp Test	ASTM D2047
Electical Resistance			EN1081 Method C	
Fungus Test				ASTM G21:96
Squareness				ASTM F2055

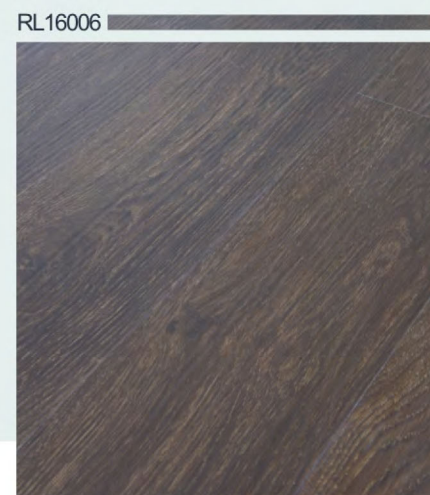

RL16006

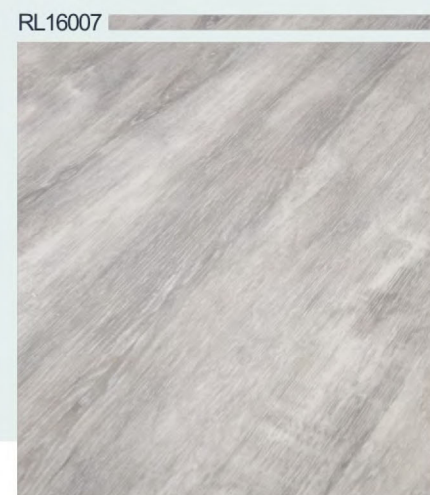

RL16007

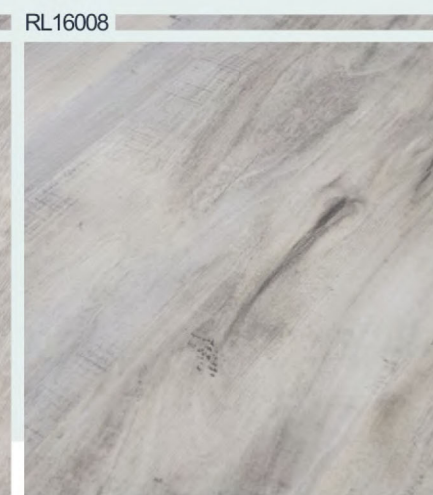

RL16008